

LIFELIGHT PRO TWIN SURFACE MOUNT









Premium LED Emergency light



The Lifelight Pro Twin Surface Mount is an energy efficient, lithium powered LED emergency light in a slim design. The Lifelight Pro provides a significant increase in emergency lighting coverage when compared to other emergency luminaires.


Suitable in a variety of applications the Lifelight Pro Twin will provide outstanding performance and will reduce installation and maintenance costs.

Applications

- | | |
|---|--|
|  Office Buildings |  Showrooms |
|  Galleries |  Retail outlets |
|  Apartments |  Theatres |

Features and Benefits

- Tested to BS EN 605982-22
- Low standby power consumption
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- CTP System compatible

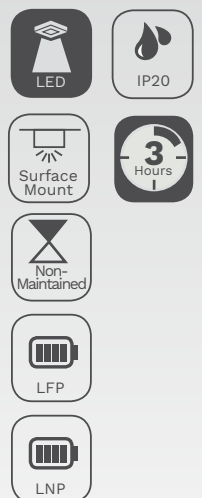

LIFELIGHT PRO TWIN SURFACE MOUNT

ORDERING INFORMATION		CLP	L10
PART NO.	Standard - White	CLIFE-2PRO-SMS-600	LLIFE-2PRO-SMS-600
	Clevertest Plus System compatible	Yes	Yes
	DALI	CLIFE-2PRO-SMS-600-DALI	LLIFE-2PRO-SMS-600-DALI
	Zoneworks® XT Hive	CLIFE-2PRO-SMS-600-ZW	LLIFE-2PRO-SMS-600-ZW
Carton Quantity	1 piece		
Weight - single	1.6kg		
Dimensions (L x W x H)	613mm x 112mm x 55mm		

POWER, LAMPS AND BATTERY	CLP	L10
Power Consumption (Standby / Max)	0.8W / 5.4W	
Lamp(s)	100,000hrs LEDs	
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 6400 mAh (X2)	3.3V / 2500 mAh (X2)
Charging Method	Intelligent current limited constant voltage	
Rated Emergency Duration (Mins)	180 min	



TECHNICAL SPECIFICATIONS	
Operating Mode	Non-Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

LUMINAIRE CLASSIFICATION	CLP				L10			
Classification	X	O	ADF	180	X	O	ADF	180

SPARE PARTS	CLP	L10
Battery	1550230 (X2)	1530232 (X2)
DALI® Node	8003061	8003061
Zoneworks® Node	8001450	8001450

PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	
Kit box (enclosure) of lamp control gear provides protection against accidental contacts with live parts	

CEILING MOUNTING HEIGHT (M)	1 LUX SPACING TABLE AND MOUNTING HEIGHTS				0.5 LUX SPACING TABLE AND MOUNTING HEIGHTS											
	Escape Routes 1 Lux min. along centre line								Open (Anti-panic) Areas 0.5 Lux min. within core area Luminaires arranged in a regular array							
	Axial Spacing		Axial to Wall		Axial Spacing		Transverse Spacing		Axial to Wall		Transverse to Wall					
	CLP	L10	CLP	L10	CLP	L10	CLP	L10	CLP	L10	CLP	L10				
4	17.9	17.4	7.3	6.8	18.6	18.4	18.6	18.4	5.7	5.7	5.7	5.4				
6	20	19.3	7.7	7.4	22.5	22.1	22.5	22.1	6.1	6	6.2	5.9				
8	20.7	19.9	7.5	6.8	25.2	24.6	25.2	24.6	6.3	6.1	6.4	6				
10	20.8	19.7	6.4	5.5	27.2	26.4	27.2	26.4	6.2	6.8	6.2	5.7				
12	19.8	18.4	4.4	3.3	28.7	27.9	28.7	27.9	5.8	5	5.7	4.2				

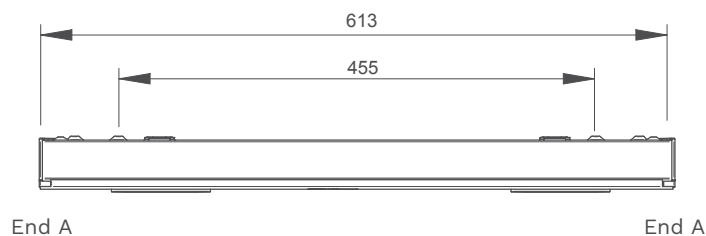

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.