


2155 Radon HP - asimmetrico 1 MODULE

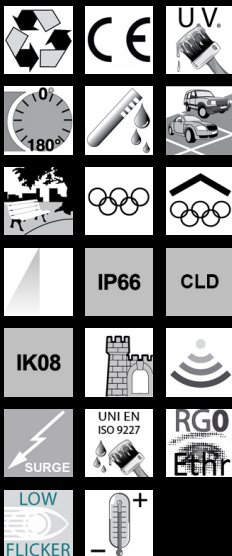


Housing: in extruded aluminium with terminal ends in die-cast aluminium.
 Reflector: in matt aluminium, high efficiency and anti-glare.
 Diffuser: 4 mm thick temperate glass resistant to thermal shock and impacts (UNI EN 12150-1:2001).
 Coating: the standard powder coating consists of a first metal surface pre-treatment stage of UV-stabilised, corrosion and salt resistant polyester powder coating
 Equipment: complete with galvanised and coated bracket. Silicone rubber gasket; external screws and bolts in stainless steel; air recirculation valve. Airtight connector for quick installation with no need to open the fixture.
 Wiring: 220-240V 50/60Hz power supply; with IP66 driver applied to the fixture. Electronic safety device to protect the LED module and the related ballast compliant with EN 61547.
 It works in two modes:
 - differential mode: surge between power cables and between the phase and neutral.
 - common mode: surge between power, L/N and ground cables or between the fixture's body if it is of class II and installed on a metal pole.

On request:
 - protection up to 10KV.
 - Possibility of centralized lighting point control or via external presence/lighting sensors
 - Coating compliant with UNI EN ISO 9227 Corrosion tests in artificial atmospheres for aggressive environments
 - Version CLD D-D (DALI) wiring with subcode -0041: thanks to pre-programmed settings or a software programme, this type of wiring allows accurate light emission dimming.

LED: Luminous flux maintenance 80%: 50.000h (L80B20).
 Power factor 0.95.

Wind surface:
 4 COB : L=915cm2 – F1437cm2
 6 COB : L=1205cm2 – F=1752cm2

Download
 DXF 2D
 - 2155.dxf

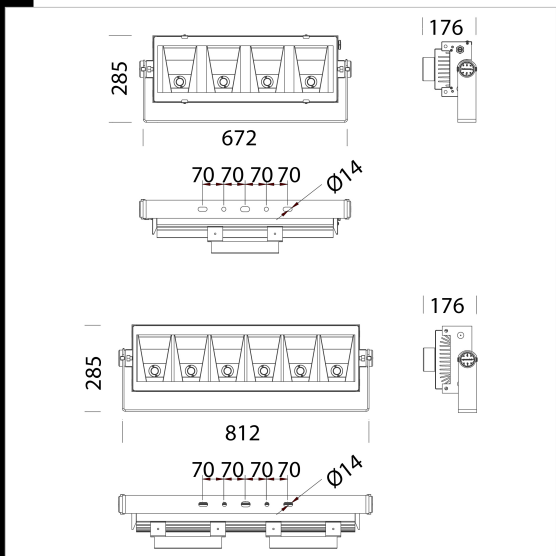

| Code | Gear | Kg | Lumen Output-K-CRI | WTot | Colour | Surge |
|-----------|------|-------|---------------------------------|-------|----------|-------|
| 413390-00 | CLD | 12.52 | LED COB-41280lm-4000K-60°-CRI70 | 272 W | GRAPHITE | 4/6kV |
| 413391-00 | CLD | 16.94 | LED COB-64254lm-4000K-60°-CRI70 | 409 W | GRAPHITE | 4/6kV |

Accessories



- 384 conveyor 4-8 COB



- 384 conveyor 6 COB

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated