

# CLEVERFIT EXIT






## LED Exit Suitable for All Applications

The Cleverfit exit is a proven market leader that is known for its reliability, energy efficiency and ease of installation. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications. The Cleverfit can be either wall or ceiling mounted and the quick connect bracket makes installation nice and easy.




IP66/67 Polycarbonate Clear Cover and Nylon Base Option Available

### Applications

-  Office Buildings
-  Schools
-  Factories
-  Retail outlets
-  Car Parks

### Features and Benefits

- Tested to BS EN 605982-22
- Compliant to EN1838 and ISO7010
- Low 1.4W to 3.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- CTP System compatible

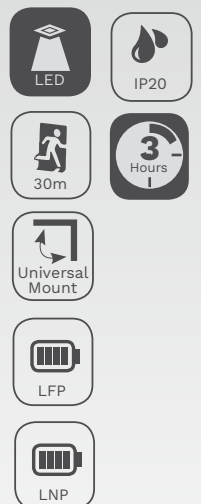

<b>EL</b> LITHIUM IRON PHOSPHATE ECONOMY <small>LOWEST UP FRONT COST</small>	<b>CLP</b> LITHIUM IRON PHOSPHATE PREMIUM <small>PROVEN PROJECT PERFORMANCE</small>	<b>L10</b> LITHIUM NANOPHOSPHATE® OPTIMUM <small>NOTHING ELSE COMPETES WITH NANOPHOSPHATE®</small>
--	---	--



# CLEVERFIT EXIT

ORDERING INFORMATION		EL ECONOMY	CLP PREMIUM	L10
PART NO.	Standard - White	ECFLED-LI	CCFLED	LCFLED
	Standard - Black	ECFLED-LI-BLK	CCFLED-BLK	LCFLED-BLK
	Clevertest Plus System compatible	No	Yes	Yes
	DALI	-	CCFLED-DALI	LCFLED-DALI
	Zoneworks® XT	-	CCFLED-ZW	LCFLED-ZW
	Theatre Version	ECFLED-LI-TH	CCFLED-TH	LCFLED-TH
	Carton Quantity	10 pieces	6 pieces	6 pieces
	Weight - single (carton)	1.2kg (15kg)	1.2kg (10kg)	1.2kg (10kg)
	Dimensions (L x W x H)	355mm x 80mm x 215mm		
	Directional Options	All Directional Inserts Included (Excluding theatre versions)		
Directional Options (Theatre Only)	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CCFLED-TH-DS-RR			

\* for additional variants please refer to the Clevertronics Product Guide or website.

POWER, LAMPS AND BATTERY	EL ECONOMY	CLP PREMIUM	L10
Power Consumption (Standby / Max)	1.4W / 2.3W	3.7W / 4.9W	3.6W / 4.5W
Lamp(s)	50,000 Hours LEDs	100,000 Hours LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Milliamp Per Hour (mAh)	3.2V / 1100mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent Current Limited Constant Voltage		
Rated Emergency Duration (Mins)	180		

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction / Body	ABS / PC
Viewing Distance	30m
Mounting type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20 (Weatherproof Version Available)



PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

SPARE PARTS	EL	CLP	L10
Battery	1560200	1550091	1530090
Lamp Bar	8002900	8002120	8002120
DALI® Node	-	8003061	8003061
Zoneworks® Node	-	8001450	8001450
Diffuser	ECFD	ECFD	ECFD

ACCESSORIES	EL	CLP	L10
Cantilever Bracket	CLVRBRT-CF-WP	CLVRBRT-CF-WP	CLVRBRT-CF-WP
Wireguard (Wall Mount)	2530053	2530053	2530053
Wireguard (Ceiling Mount)	2530110	2530110	2530110
IP66/67 Cover / Base	2710140	2710140	2710140

LUMINAIRE CLASSIFICATION	EL				CLP				L10			
Classification	X	1	ADG	180	X	1	ADFG	180	X	1	ADFG	180

## IP66/67 WEATHERPROOF OPTION AVAILABLE

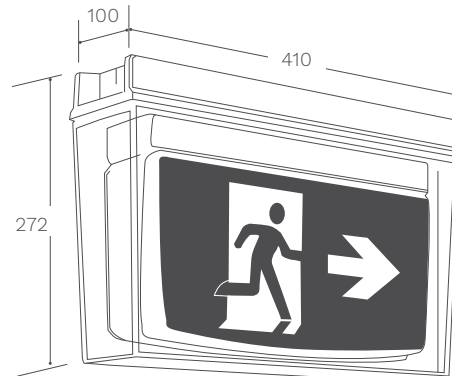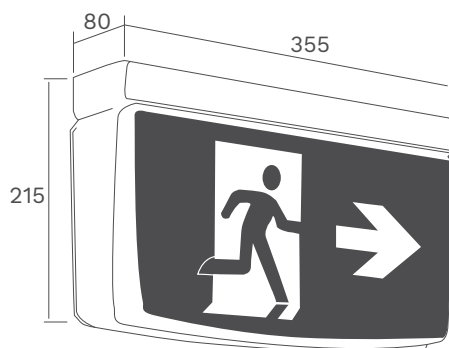

Dimensions (mm)

\*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.