

CLEVERFIT PRO EXIT



Modern and Slimline Architectural Exit

The Cleverfit PRO Exit offers a practical solution in a slimline, architecturally pleasing design. The tamper resistant cover makes it possible to include all diffuser combinations in one box for single or double sided applications. With a slide connect steel bracket that can be both ceiling or wall mounted, it is easy to see why the Cleverfit PRO is a market leader.




Applications

-  Office Buildings
-  Retail outlets
-  Showrooms
-  Apartments
-  Shopping Centres



Features and Benefits

- Tested to BS EN 605982-22
- Compliant to EN1838 and ISO7010
- Low 3.7W standby power consumption
- Wall and ceiling mount with easy slide connect
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- CTP System compatible

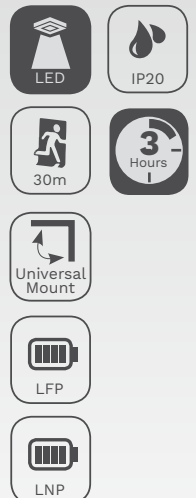

CLEVERFIT PRO EXIT

ORDERING INFORMATION		CLP PREMIUM	L10
PART NO.	Standard - White	CCFPRO	LCFPRO
	Standard - Black	CCFPRO-BLK	LCFPRO-BLK
	Clevertest Plus System compatible	Yes	Yes
	DALI®	CCFPRO-DALI	LCFPRO-DALI
	Zoneworks® XT	CCFPRO-ZW	LCFPRO-ZW
	Theatre Version	CCFPRO-TH	LCFPRO-TH
	Carton Quantity	5 pieces	6 pieces
	Weight - single (carton)	2.5kg (15kg)	1.2kg (10kg)
	Dimensions (L x W x H)	367mm x 72mm x 214mm	
	Directional Options	All directional inserts included in the box (Up, Down, Left, Right)	
Directional Options (Theatre Only)	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CCFPRO-TH-DS-RR		

* for additional variants please refer to the Clevertronics Product Guide or website.

POWER, LAMPS AND BATTERY	CLP PREMIUM	L10
Power Consumption (Standby / Max)	3.7W / 4.8W	3.8W / 5W
Lamp(s)	100,000hrs LEDs	
Battery	Lithium Iron Phosphate	Lithium Nanophosphate®
Voltage (V) / Milliamp per hour (mAh)	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent current limited constant voltage	
Rated Emergency Duration (Mins)	180	

TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V (50Hz)
Construction / Body	PC-ABS / PC
Viewing Distance	30m
Mounting type	Wall & Ceiling (Single & Double Sided)
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

LUMINAIRE CLASSIFICATION	CLP				L10			
Classification	X	1	AG	180	X	1	AG	180

SPARE PARTS	CLP PREMIUM	L10
Battery	1550030	1530030
Lamp Bar	8002710	8002710
DALI® Node	8003061	8003061
Zoneworks® Node	8001450	8001450
Diffuser	2360192	2360192

ACCESSORIES	CLP PREMIUM	L10
Cantilever Bracket	CLVRBRT-CFPRO	CLVRBRT-CFPRO
Wireguard (Wall Mount)	2530053	2530053
Wireguard (Ceiling Mount)	2530110	2530110



Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.