


## Configuration Sheet

# 5 Bowe - RECESSED - FBRT

Recessed

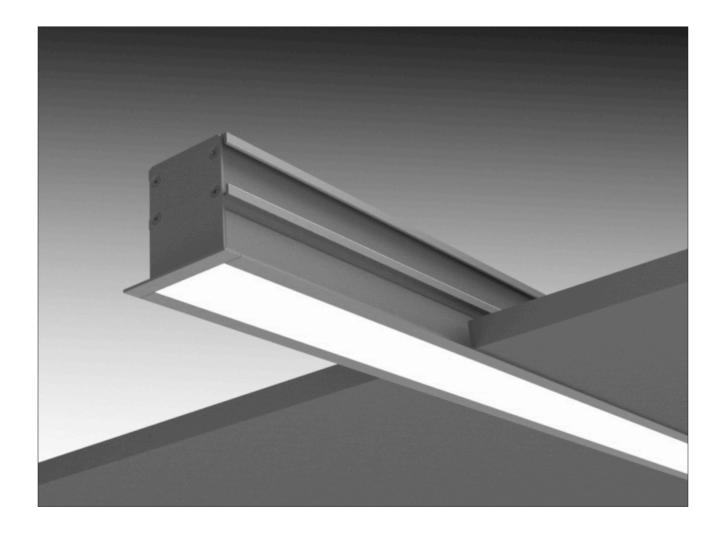

### 5 Bowe - RECESSED - FBRT

Recessed

#### 1. Base Model

FBRT Recessed

2. Run Length

Enter length in mm for custom lengths.

See Standard Lengths and Shapes PDF for standard products.

### 3. LED Lamping

LOW - xxxXK (example: MED-4000K)

MED - xxxXK (example: MED-4000K)

HI - xxxxK (example: HI-4000K)

CV - xxxxK

STD - TW HI - TW

STD - RGBW - XXXXK

HI - RGBW - xxxxK

#### 4. LED Driver

1-10V 1-10V dimming
DALI DALI dimming
DMX DMX dimming
NONDIM Non-dimmable

OTHER (Consult factory for options)

### 5. Finish

AL Standard, natural aluminium

BK Black powdercoat WH White powdercoat

RAL/ \_\_\_ Specify RAL powdercoat (ex: #RAL/3003)

BRONZE Bronze powdercoat

#### 6. Additional options

EM 3 hour Emergency Kit

DALIEM 3 hour DALI Emergency Driver/Battery


DALIEMPRO 3 hour DALI EMPRO Emergency Driver/Battery

PIR-A PIR Absence Detector
PIR-P PIR Presence Detector
DALIPIR DALI PIR Sensor
OTHER Contact Factory


### 5 Bowe - RECESSED - FBRT

Recessed

### **Dimensions**

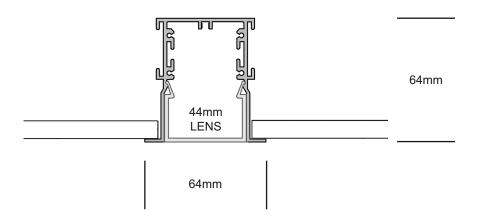

## **Mounting Options**



### 5 Bowe - RECESSED - FBRT

Recessed

#### Housing

100% recyclable, extruded architectural grade T6061 aluminium

Luminaires can be wired for emergency circuit and/or emergency battery backup. Consult factory for options.

### Options

Mitered Corners


Consult factory for mitered corner angle options.

Standard finish is "Ultimatte" aluminium - a smooth, clean and durable finish acheived from a deep-etch and two step clear anodizing process. White, Black, Bronze or custom RAL powdercoat options are also available.





AL - ALUMINIUM



Default canopy finish is to match fitting color, unless otherwise specified





**BK** - BLACK



Configuration Sheet - REV 3



**Mitered Corners**