

JUMBO LED EXIT



Jumbo Exit for Larger Viewing Distances

The Jumbo LED Exit caters for 50m viewing distance applications by using a 250mm high pictograph.

Featuring a robust steel housing with slide in diffusers and back plates for single and double sided configurations, the Jumbo LED Exit is easy to install as a wall or ceiling mounted exit.



Applications

- | | |
|---|--|
|  Warehouses |  Stadiums |
|  Factories |  Halls |
|  Car Parks |  Train Stations |

Features and Benefits

- Tested to BS EN 605982-22
- Compliant to EN1838 and ISO7010
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- Clevertest Plus System compatible
- DALI® and Zoneworks® test options available



JUMBO LED EXIT

| ORDERING INFORMATION | | EL | CLP | L10 |
|--------------------------|-----------------------------------|---|----------------|----------------|
| PART NO. | Standard | EJELED-50-LI | CJELED-50 | LJELED-50 |
| | Clevertest Plus System compatible | No | Yes | Yes |
| | DALI | - | CJELED-50-DALI | LJELED-50-DALI |
| | Zoneworks® XT | - | CJELED-50-ZW | LJELED-50-ZW |
| Carton Quantity | | 1 | | |
| Weight - single (carton) | | 7.3kg | | |
| Dimensions (L x W x H) | | 630mm x 100mm x 320mm | | |
| Directional Options | | All directional inserts included in the box | | |


| POWER, LAMPS AND BATTERY | EL | CLP | L10 |
|-----------------------------------|--|------------------|------------------------|
| Power Consumption (Standby / Max) | 2.9W / 4W | 3.2W / 5.6W | |
| Lamp(s) | 50,000 Hour LED | 100,000 Hour LED | |
| Battery type | Lithium Iron Phosphate | | Lithium Nanophosphate® |
| Voltage (V) / Capacity (mAh) | 3.2V / 6000mAh | 3.2V / 6400mAh | 3.3V / 5000mAh |
| Charging Method | Intelligent Current Limited Constant Voltage | | |

| TECHNICAL SPECIFICATIONS | |
|-----------------------------------|---|
| Operating Mode | Maintained |
| Voltage (V) (Frequency (Hz)) | 220-240V (50Hz) |
| Construction - Body / Diffuser | Powder Coated Metal / Acrylic |
| Pictograph Height | 250mm |
| Viewing Distance | 50m |
| Mounting Type | Wall and Ceiling Single and Double Sided |
| Operating Temperature | 0°C to 40°C |
| Ingress Protection Rating (IP) | IP20 |

| SPARE PARTS | EL | CLP | L10 |
|--------------------|--------------|--------------|--------------|
| Battery | 156025X | 1550229 | 1530232 |
| Lamp Bar | 8003055 | 8002470 | 8002470 |
| DALI Node | N/A | 8003060 | 8003060 |
| Zoneworks® XT Node | N/A | 8003190 | 8003190 |
| Diffuser | PJED-R-SLIDE | PJED-R-SLIDE | PJED-R-SLIDE |

| LUMINAIRE CLASSIFICATION | EL | | | | CLP | | | | L10 | | | |
|--------------------------|----|---|----|-----|-----|---|------|-----|-----|---|------|-----|
| Classification | X | 3 | AG | 180 | X | 3 | ADGF | 180 | X | 3 | ADGF | 180 |

| PROTECTION | |
|---|--|
| Battery overvoltage & overcurrent protection | |
| Battery deep discharge protection | |
| Supply voltage polarity reversal protection | |
| Battery short-circuit protection (charging will resume upon removal of fault) | |

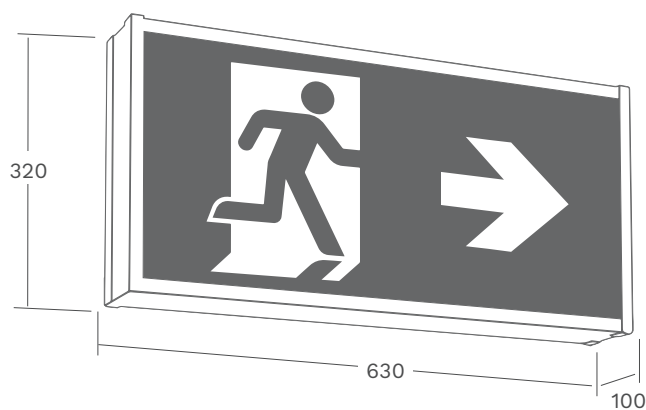

Dimensions (mm)

*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.