

LT

LIGHT & TOUCH

SPECIFICATION GUIDE

Saturns Rings 1

– MR1

LED – 25 mm x 28 mm

FEATURES

Six Diameter Options:

- 900 mm
- 1200 mm
- 1500 mm
- 1800 mm
- 2400 mm
- 3000 mm

Direct or Indirect Distribution

Up to 11982 LM and 136 LM/W

Two Standard Output Options

RGB+W Option


Remote DALI, DMX, 10V or Phase Driver

Dimming Down to 0%


Remote Sensor Options

Silver, White, Black, Bronze or Custom RAL Finish

SUSPENDED

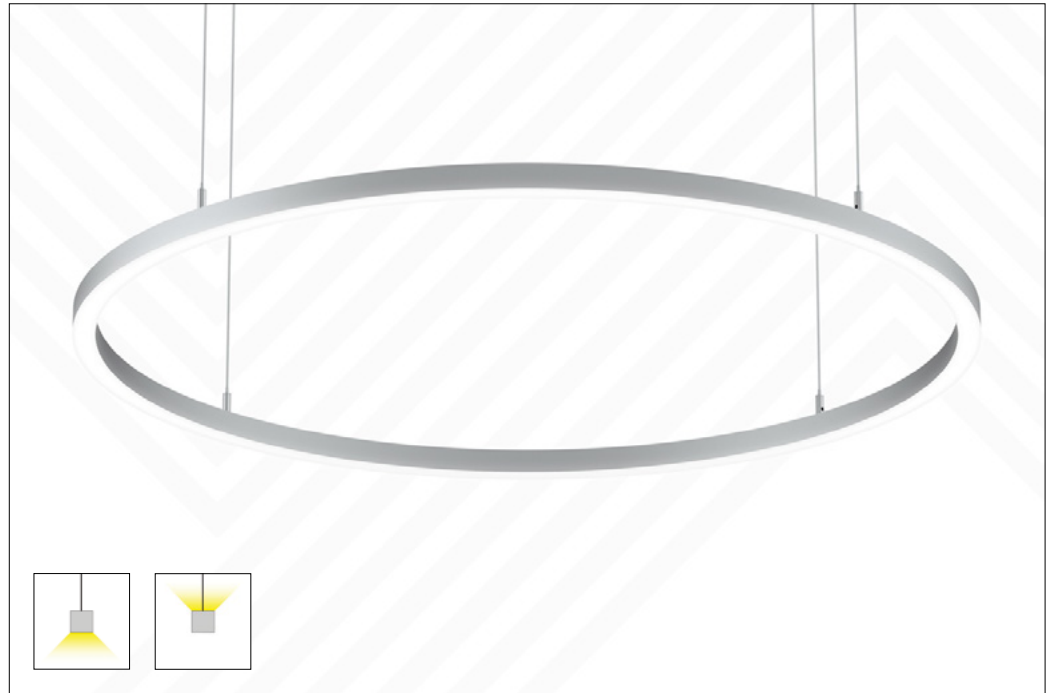

SURFACE / RECESSED

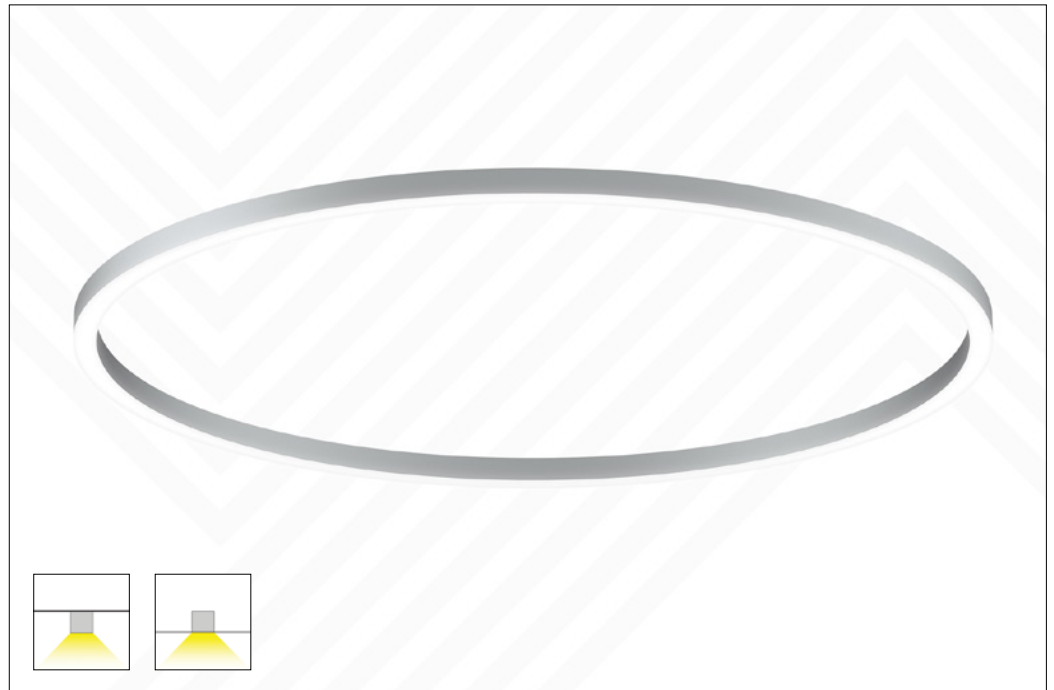

Saturns Rings 1

MR1 | Suspended, Surface, Recessed

INSTRUCTIONS

Digital users: Check selection boxes and fill in fields directly in fillable, interactive PDF, save file, submit to Light Forms.

Manual users: Check selection boxes and fill in fields with pen, scan and save ALL pages as PDF document, submit to Light Forms.

1. BASE MODEL / MOUNTING Select ONE

MR1-S	Suspended
MR1-SM	Surface-Mount (directly only)
MR1-RPB	Recessed, Plasterboard Ceiling
MR1-RDT	Recessed, Drop Tile Ceiling
MR1-RO	Recessed, Other Ceiling Type

2. SIZE* Select ONE

900	900 mm diameter	1800	1800 mm diameter
1200	1200 mm diameter	2400	2400 mm diameter
1500	1500 mm diameter	3000	3000 mm diameter

3. LAMPING & LENS Select NONE or ONE from EVERY category (note exceptions below)

NONE Select when specifying downlight spots only

DISTRIBUTION	OUTPUT	CRI	CCT	LENS
DIRECT	LOW	80	2700K	DIFF Diffuse
INDIRECT#	MED	90	3000K	
	RGBW^		3500K	
			4000K	
			5000K	
			6500K	

*Not available with surface mount nor recessed

^For RGBW, CRI does not apply (leave unchecked) and select 3000K or 4000K CCT only. White LEDs can remain uncommissioned for RGB-only output.

4. REMOTE DRIVER* Select ONE

NONDIM	Non-dimming
DALI#	DALI driver, dimming down to 1%
1/10V	1-10V, dimming down to 1%
0/10V	0-10V, dimming down to 0%
DMX^	DMX driver, dimming down to 1%
PHASE	For use with phase-cut triac, IGBT or sine wave dimmer switches

#DALI is required for use with TUNE/S; DALI (or DMX) is required for RGB/S

^DMX (or DALI) is required for use with RGB/S

Saturns Rings 1

MR1 | Suspended, Surface, Recessed

5. FINISH* Select ONE

SV	Metallic silver powdercoat
WH	White powdercoat
BLK	Black powdercoat
BZ	Metallic bronze powdercoat
RAL/ _ _ _ _	Custom RAL# colour powdercoat, ex: RAL/3000

*Contact factory for additional finish options including Interpon, Farrow & Ball and silver and gold plating

*See RAL colour options and codes at lightforms.com/RAL

6. POWERFEED COLOUR Select ONE

GP	Grey (standard for suspended, default for other mountings)
WP	White
BP	Black
TP	Transparent
XP	Custom colour (contact Light Forms for options)

7. CANOPY Select ONE

NONE	Select NONE when specifying surface mount
STD	115 mm canopy for each separate powerfeed and suspension point (standard)
SMALL	82 mm canopy for each separate powerfeed and suspension point
COMBO	115 mm combo canopy for locations with both a powerfeed and suspension point
CCSTD	115 mm centralised combo canopy for powerfeed and all cables
CCLG	360 mm centralised combo canopy for powerfeed and all cables

8. OPTIONAL ADD-ONS Select as many as apply

A. EMERGENCY

EM	Remote, 3-hour emergency battery, manual testing
EM/DALI	Remote, 3-hour emergency battery with DALI interface, automatic testing
EC	Emergency circuit

B. SENSOR

PRES	Remote, PIR presence detector
DALI/PRES	Remote, DALI-compatible PIR presence detector
PHOTO	Remote, photocell/daylight detector

C. WIRELESS CONTROL


OLP*	Remote, Osram Lightify Pro wireless control module
-------------	--

*Must choose DALI option in DRIVER section.



Saturns Rings 1

MR1 | Suspended, Surface, Recessed

DIMENSIONS

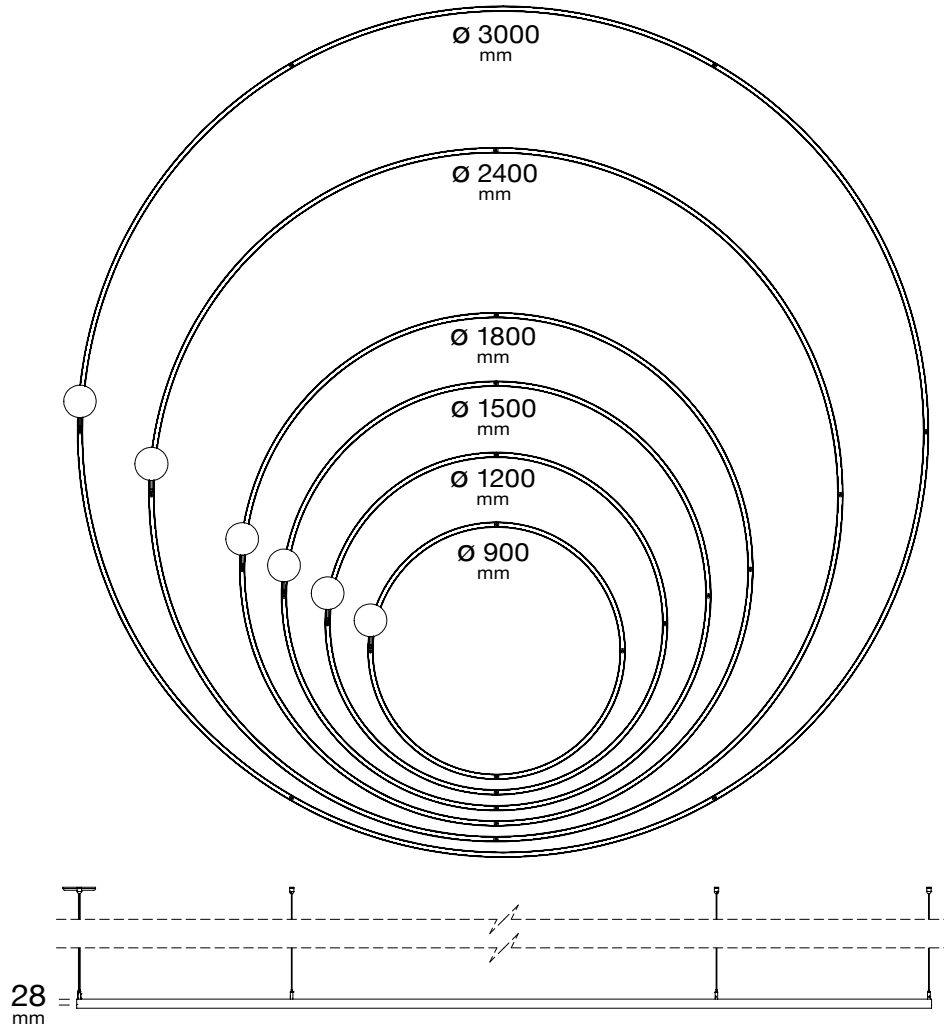

DISTRIBUTION



Saturns Rings 1

MR1 | Suspended, Surface, Recessed

LED LAMPING – OPTIONS & PERFORMANCE DATA*

OUTPUT OPTIONS	SIZE OPTIONS DIAMETER	DELIVERED LUMENS LM	WATTS W	EFFICACY LM/W	CRI OPTIONS	CCT OPTIONS	WEIGHT G
LOW#	900	1390	41	34	80 90	2700K 3000K 3500K 4000K 5000K 6500K	2227
	1200	1854	54				2895
	1500	2317	68				3564
	1800	2781	81				4292
	2400	3708	109				5631
	3000	4635	136				6968
MED#	900	3595	44	82	80 90	2700K 3000K 3500K 4000K 5000K 6500K	2227
	1200	4793	58				2895
	1500	5991	73				3564
	1800	7189	87				4292
	2400	9586	116				5631
	3000	11982	145				6968
RGBW	900	system - N/A	54	28	N/A (entire system) 80 (white only)	3000K 4000K	2227
		white only - 721	25				
	1200	system - N/A	72				2895
		white only - 961	34				
	1500	system - N/A	90				3564
		white only - 1201	42				
	1800	system - N/A	109				4292
		white only - 1441	51				
	2400	system - N/A	145				5631
		white only - 1922	68				
	3000	system - N/A	181				6968
		white only - 2402	85				

L80 > 50,000 hours
Luminous flux +/- 5%

**Data provided is for either direct OR indirect distribution; performance values are the same for both.*

**Performance data is based on a connected-load photometric test of MED output with 80 CRI at 4000K using a DALI driver and DIFF lens. Data values for all other outputs are extrapolations.*

LENS

DIFF is a white satin, flush diffuser lens that produces smooth, even light across the lens surface.



Diffuse
DIFF

Saturns Rings 1

MR1 | Suspended, Surface, Recessed

SPECIFICATION DETAILS

HOUSING

100% recyclable, extruded architectural grade aluminium with minimum 2mm thickness.

WEIGHT


Approximately 2227-6968 grams per unit. Weight may vary depending on mounting and other options.

FINISH OPTIONS

Silver, White, Black, Bronze or custom RAL powdercoat. Contact Light Forms for other finish options (Interpon, Farrow & Ball, and silver and gold plating).




Silver
SV



White
WH



Black
BLK



Bronze
BZ



Custom RAL
RAL

View all RAL colour options at: <https://lightforms.com/RAL>

REMOTE SENSORS


Optional, presence (PRES), DALI-compatible PIR presence (DALI/PRES) and daylight harvesting (PHOTO) sensors available. Contact Light Forms for further information.

OPERATING TEMPERATURE


Luminaire MUST be installed and operated ONLY in dry or damp environments where the ambient temperature ranges from -20°C to 50°C. Luminaire operation in environments outside this temperature range voids the warranty AND may damage the product or adversely impact lamp life, lumen output and colour consistency.

SUSPENSION MOUNT CANOPY OPTIONS


STD comprises separate 115 mm powerfeed canopy and cable bullet at powerfeed locations. SMALL comprises separate 85 mm powerfeed canopy and cable bullet at powerfeed locations. COMBO comprises combined 115mm canopy (canopy and cable bullet) at powerfeed locations. These three options include cable bullets for non-powerfeed locations. CCSTD is one standard centralised canopy for powerfeed and all cable attachments. CCLG is one large centralised canopy for powerfeed and all cable attachments.




Standard
STD




Small
SMALL



Combo
COMBO



Central Combo
Standard
CCSTD

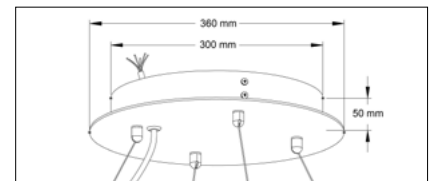

Central Combo
Large
CCLG

WARRANTY

5-year limited warranty.

MANUFACTURING & CERTIFICATION


Products are manufactured in and comply with the health, safety and environmental protection standards of the respective region in which they are sold.



Europe



Asia



Greater India
+ Middle East

Saturns Rings 1

MR1 | Suspended, Surface, Recessed

PHOTOS

