

# ULTRABLADE PRO RECESSED EXIT



## Recessed Architectural Blade Exit

The sophisticated look and design of the Ultrablade PRO will satisfy all architectural requirements for a premium recessed exit.

With its low profile design, only 80mm of ceiling space is required during installation, combine this with a reduced reflection and halo effect on the diffuser and a decal that is scratch and fingerprint resistant it is no wonder the Ultrablade PRO is the industry standard for an architectural blade exit.

### Applications


- Office Buildings
- Retail outlets
- Galleries
- Apartments
- Shopping Centres

<b>EL</b> LITHIUM IRON PHOSPHATE ECONOMY <small>LOWEST UP FRONT COST</small>	<b>CLP</b> LITHIUM IRON PHOSPHATE PREMIUM <small>PROVEN PROJECT PERFORMANCE</small>	<b>L10</b> LITHIUM NANOPHOSPHATE® OPTIMUM <small>NOTHING ELSE COMPETES WITH NANOPHOSPHATE®</small>
--	---	--



### Features and Benefits

- Tested to BS EN 605982-22
- Compliant to EN1838 and ISO7010
- Low 1.5W to 1.8W standby power consumption
- Wall and ceiling mount
- All directional decals in one box
- Lithium Iron Phosphate or Nanophosphate® battery
- DALI® and Zoneworks® test options available
- CTP System compatible

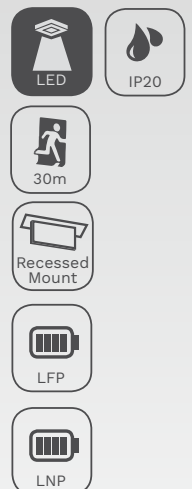

# ULTRABLADE PRO RECESSED EXIT

ORDERING INFORMATION		EL ECONOMY	CLP PREMIUM	L10
PART NO.	Standard - White	EUBPRO-LI	CUBPRO	LUBPRO-SM
	Standard - Black	-	CUBPRO-BLK	LUBPRO-SM-BLK
	Clevertest Plus System compatible	No	Yes	Yes
	DALI®	-	CUBPRO-DALI	LUBPRO-SM-DALI
	Zoneworks® XT	-	CUBPRO-ZW	LUBPRO-SM-ZW
	Theatre Version	No	CUBPRO-TH	LUBPRO-TH
	Carton Quantity	5		
	Weight - single (carton)	1.1kg (7.5kg)		
	Dimensions (L x W x H)	17mm x 8.7mm x 157mm - Blade Assembly 385mm x 67mm - Cover Plate 350mm x 48mm - Ceiling cutout		
	Directional Options	All directional inserts included in the box (Up, Down, Left, Right)		
Directional Options (Theatre Only)	-	Add Suffix to Part Number, -DS Double Sided, -R Pictograph, L (Left) or R (Right) ie. CUBPRO-TH-DS-RR		

POWER, LAMPS AND BATTERY	EL ECONOMY	CLP PREMIUM	L10
Power Consumption (Standby / Max)	1.5W / 2.5W	1.8W / 3.9W	1.9W / 4.1W
Lamp(s)	50,000hrs LEDs	100,000hrs LEDs	
Battery	Lithium Iron Phosphate		Lithium Nanophosphate®
Voltage (V) / Milliamp per hour (mAh)	3.2V / 1500mAh	3.2V / 3200mAh	3.3V / 2500mAh
Charging Method	Intelligent current limited constant voltage		
Rated Emergency Duration (Mins)	180		


TECHNICAL SPECIFICATIONS	
Operating Mode	Maintained
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Construction / Body	ABS / PC
Viewing Distance	30m
Mounting type	Recessed
Operating Temperature	1°C to 40°C
IP Rating (IP)	IP20

SPARE PARTS	EL	CLP	L10
Battery	1560100	1550050	1530030
Lamp Bar	8002179	8002178	8002178
DALI® Node	N/A	8003061	8003061
Zoneworks® Node	N/A	8001450	8001450
Diffuser	2310250	2310250	2310250

LUMINAIRE CLASSIFICATION	EL				CLP				L10			
Classification	X	1	AG	180	X	1	AG	180	X	1	AG	180

PROTECTION	
	Battery overvoltage & overcurrent protection
	Battery deep discharge protection
	Supply voltage polarity reversal protection
	Battery short-circuit protection (charging will resume upon removal of fault)

Dimensions (mm)

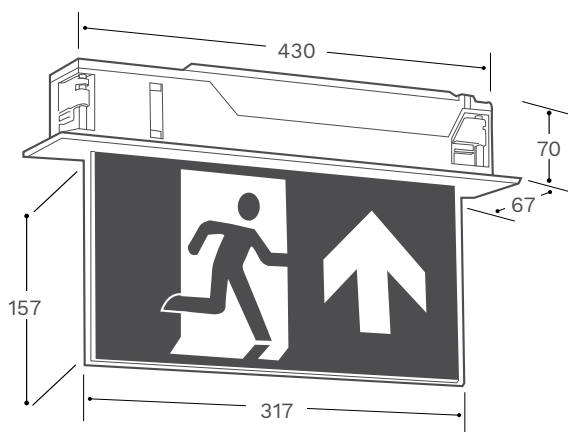

\*Warranty information located at: <https://clevertronics.co.uk/product-warranty-statement/>

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.